


Antenna-Roof-L

Roof mounted antenna



- Applications**
- Roof
 - Cabinet

LTE Multi-band Antenna for 2G, 3G, 4G applications

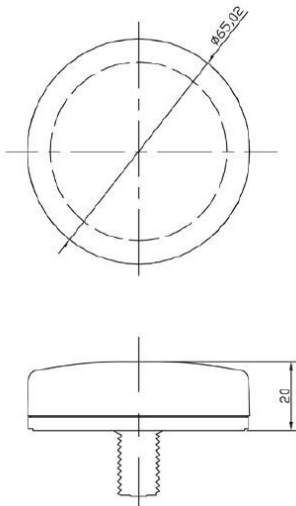

Tolerance: $\pm 0.5\text{mm}$

Frequencies

- LTE
- UMTS
- GSM

Specifications

General	Dimension: 65mm(Dia.) x 20mm(H) Operation Temperature: -40degC to +80degC Storage Temperature: -45degC to +100degC
LTE	Frequency: 704~960 MHz, 1710~2690 MHz Gain(1m cable): 5dBi@700~960MHz, 2dBi@1710~2690MHz V.S.W.R: <2.0 Impedance 50 Ohm Cable/Connector 1m RG-174 Cable-SMA Polarization: Linear Power Handling Capacity: 5W
Note	Gain values based on 1m cable. Cable loss 1.2 dB/m.

NetModule AG
Meriedweg 11
3172 Niederwangen

T +41 31 985 25 10
F +41 31 985 25 11

Switzerland

NetModule GmbH
Frankfurter Strasse 92
65760 Eschborn

T +49 6196 77 99 79 0
F +49 6196 77 99 79 9

Germany