


## SAX / PAX Terminal/Test Blocks & Probes

Testing Solutions  
for  
Electric Power

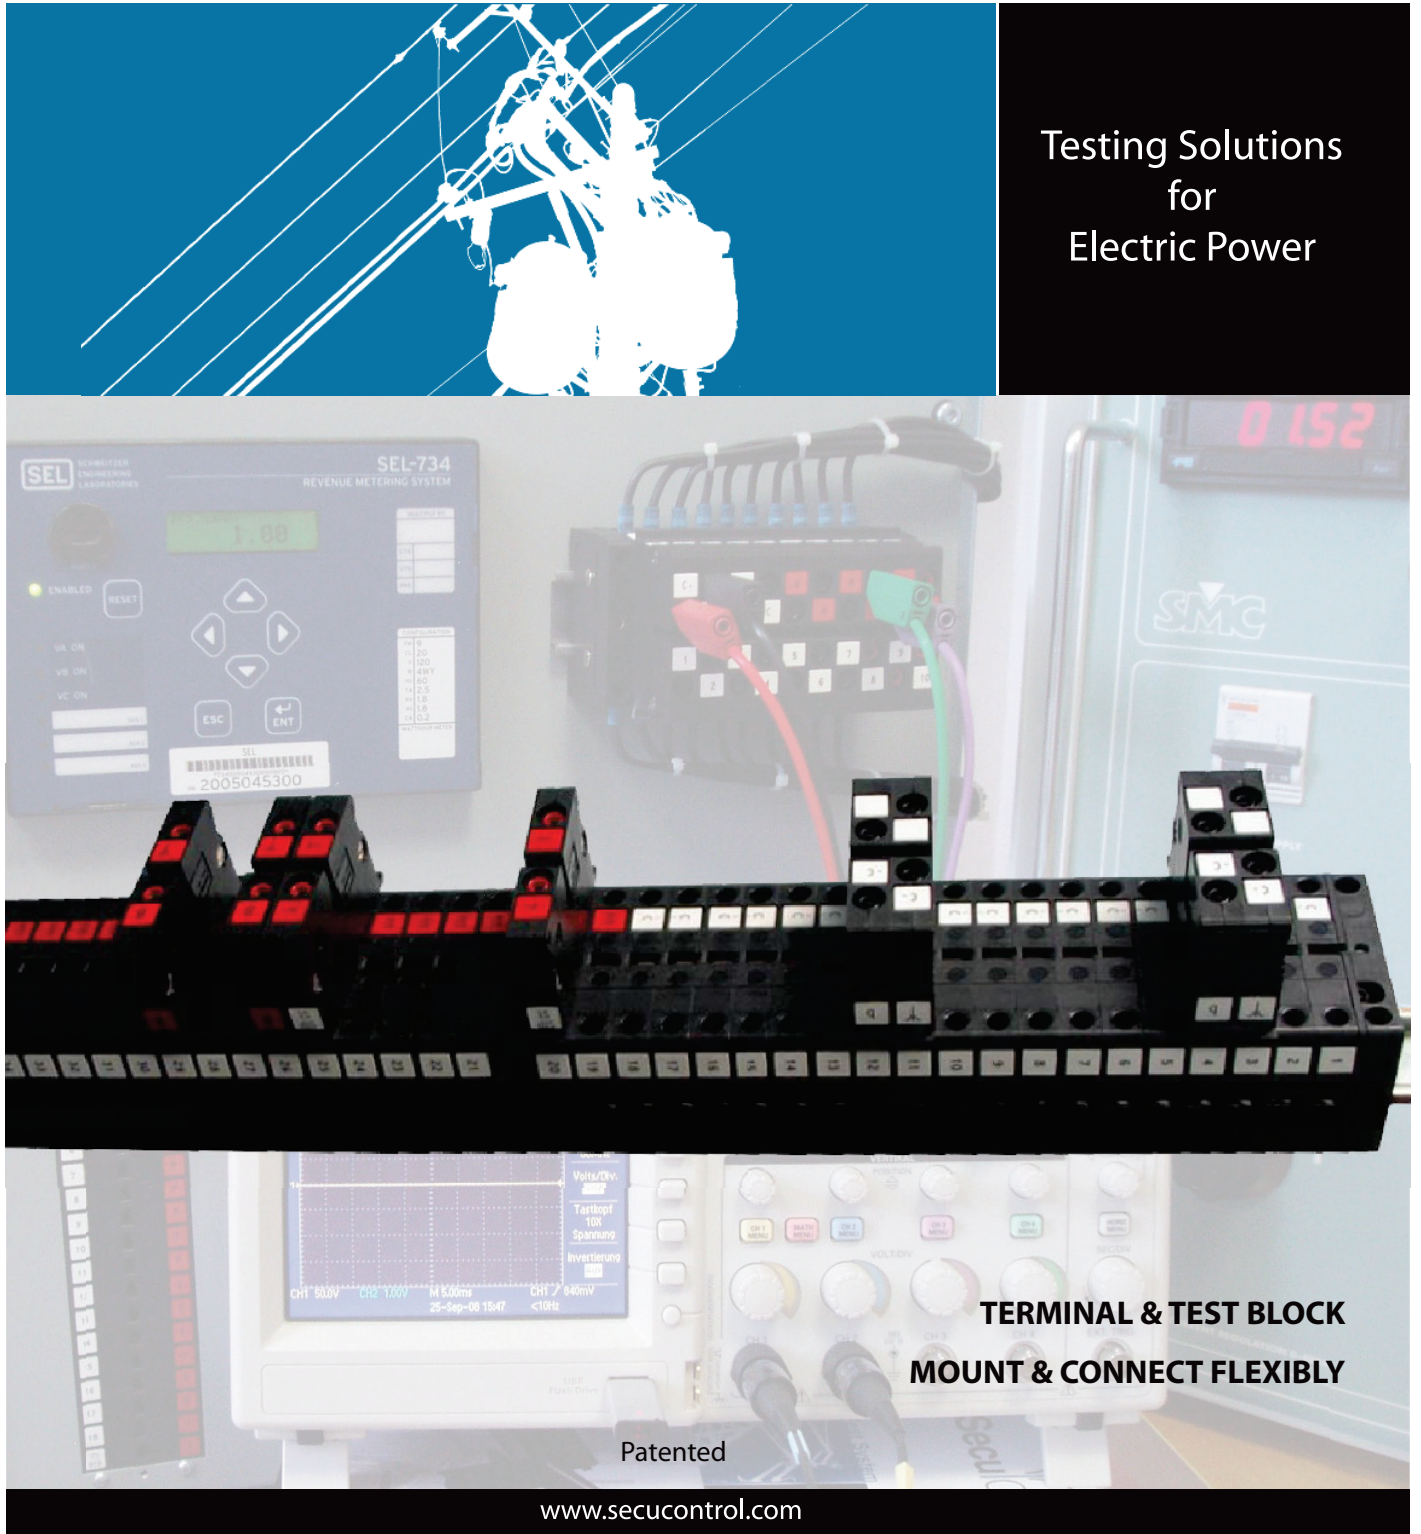

**TERMINAL & TEST BLOCK  
MOUNT & CONNECT FLEXIBLY**

Patented



SAX is a surface mount terminal / test block combination for interfacing substation devices (protection relays, fault recorders, revenue meters, . . . ) to the voltage and current transformers and to other equipment on the system side of a power grid.

PAX is a test plug keyed to a particular configuration of SAX blocks. Once inserted into the corresponding SAX block, the PAX plug isolates the substation device from the system side equipment while at the same time allowing connection of test equipment for secondary injection tests.

## Key Features

- Terminal block and test block in one - reducing panel space and wiring time
- Finger-safe test block and test plug increase safety during testing
- Test plugs are keyed to the corresponding test blocks and help eliminate human errors during testing
- Extremely low internal resistance ( $< 2 \text{ m}\Omega$ ) helps reduce heat inside cabinets and panels and decreases the risk of saturation when using 1 A current transformers
- Available in 4 to 20 pole configurations
- Facilitates efficient, standardized testing procedures
- DIN rail mount or surface mount with screws

## Technical Specifications

<b>Current withstand</b>	30 A continuous 500 A for 1 second
<b>Maximum voltage</b>	600 V
<b>Contact resistance</b>	$\leq 2 \text{ m}\Omega$
<b>Dielectric withstand</b>	3.0 kV RMS for 1 minute between adjacent contact pairs and between any contact pair and other metal parts 2.0 kV RMS for 1 minute between open contacts when test plug is inserted
<b>Voltage impulse</b>	3 positive and 3 negative impulses of 5 kV peak, 1.2/50 $\mu\text{s}$ , 0.5 J between adjacent contact pairs and between all contact pairs and other metal parts
<b>UL94 flammability class</b>	V-0
<b>Enclosure protection</b>	IP20 (without optional cover)

SAX / PAX has been classified as electromagnetically benign by the Guide for the EMC Directive 2004/108/EC and is, therefore, excluded from the scope of the EMC Directive.

SAX / PAX meet or exceed all requirements from ANSI / IEEE C37.90-2005.

**SecuControl**<sup>®</sup> [www.secucontrol.com](http://www.secucontrol.com)

**North America**  
SecuControl, Inc.  
2873 Duke Street  
Alexandria, VA 22314, USA  
ph: +1 703 838 7677  
mail@secucontrol.com

**Europe**  
SecuControl GmbH  
Ascherslebener Str. 3  
D-06333 Hettstedt, Germany  
ph: +49 3476 550 022  
info@secucontrol.com

**South America**  
SecuBrasil Ltda  
Rod. Jose Carlos Daux, 8600  
88050-001 Florianopolis SC, Brazil  
ph: +55 48 3371 1670  
comercial@secubrasil.com