



FGO

LTE/Multiband High Gain Omni Antenna

Features

- ◆ High Gain Omni Antenna
- ◆ Covers LTE/4G, 3G, GSM and cellular bands
- ◆ Ideal for fringe network areas
- ◆ Supplied with Mount Bracket

Specifications

Frequency range	690-960 / 1710-2170 / 2500-2700 MHz
Peak Gain	5 dBi
Polarisation	Linear
Impedance	50 Ohm
VSWR	<2.0:1
Power rating	10W
Operating Temp.	-40 to +70 degrees C
Cable / Connector	No cable, N-Female connector
Dimensions	390 x 32mm (hxd) excluding bracket

Popular Ordering Options

FFGO35342-NF-XX	FGO Omni antenna with N-Female Connector
-----------------	--

Specifications subject to change without notice.


5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com




FGO| LTE Multiband High Gain Omni Antenna

VSWR

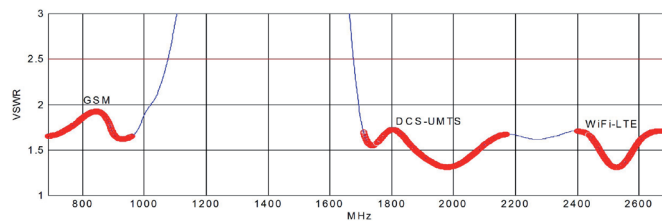

Outline Drawing

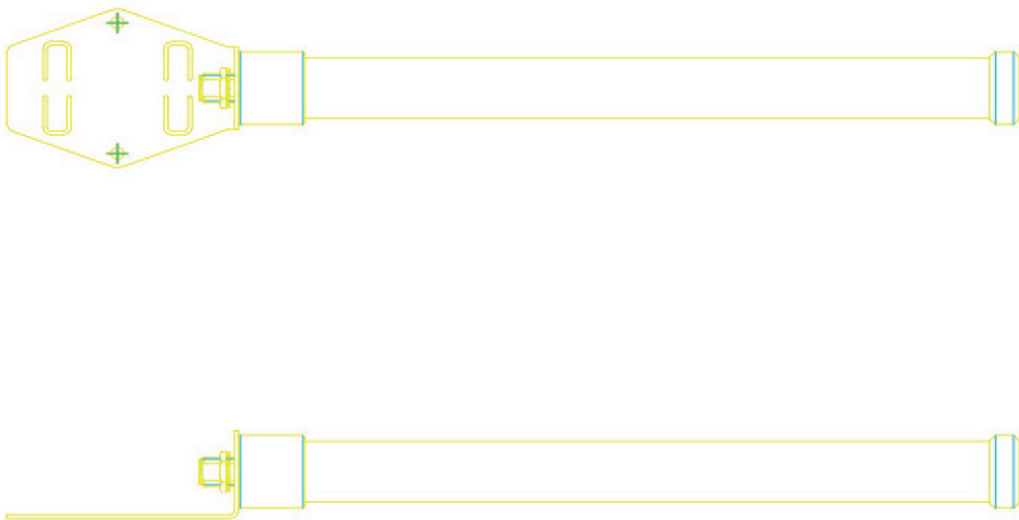

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com