


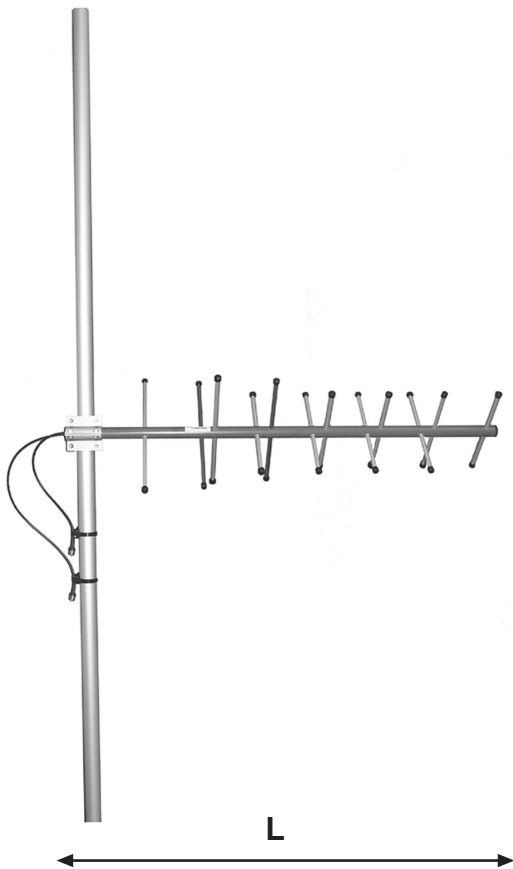

FREQUENCY INDEPENDENT DATA

Description: cross-polarized yagi, dual feed, physically quarter wavelength along the boom phased,

Frequency: 380-410 MHz, 405-440 MHz, 440-475 MHz, 830-890 MHz, 890-960 MHz

Impedance: 50 ohm

Gain: 10 dBi

Polarization: dual/circular

Isolation: 30 dB

Connector: 2*N-female/2*TNC-female

VSWR: < 1.5

Radome: UV resistant ABS, RAL 7012, PU foam filling

Radiator: copper


Passive elements: coated aluminium

Attachment: Ø 35-60 mm, aluminium alloy bracket, stainless steel V-bolts and self locking nuts

Lightning protection: DC-short circuited

Temperature: -40 - +80 C

IP: 67

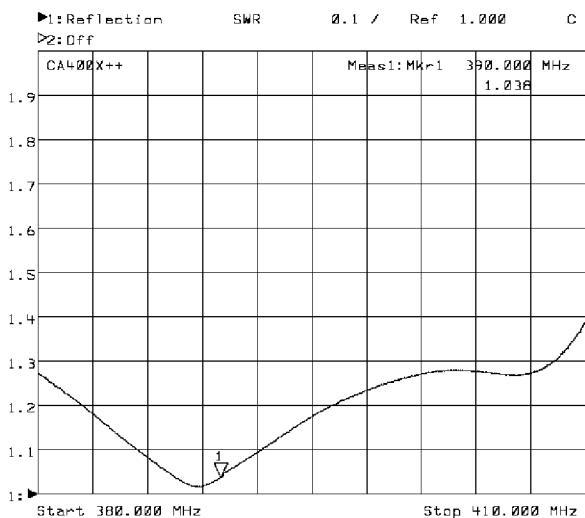

RADIATION PATTERN

