

5G Industrial Cellular Router

Merlin 3100 Series

- **Versatile LTE cellular router**
 - Zero-touch large scale deployment
 - Multi-service support: 5G and Ethernet
 - Industrial protocol gateway and conversion
 - Compact design
- **Best-in-class Cybersecurity**
 - Secure Boot ensures software is authentic and unmodified
 - Trusted Platform Module keeps cryptographic keys secure
 - Cybersecurity suite: 802.1X, IPSec encryption, stateful firewall



EN 61000-6-2
Industrial Immunity

EN 61000-6-4
Industrial Emission


RED
Radio equipment
directive

The Merlin series of versatile cellular routers provide high speed data network connectivity for demanding industrial and smart grid applications. Coupled with the Zero Touch deployment software Activator, it provides cost-effective, reliable, and consistent onboarding of routers in large-scale projects.

This compact, rugged unit is suited to tight spaces. Its high MTBF and wide temperature range support maximum service life.

To achieve best-in-class cybersecurity, the Merlin series is equipped with a TPM (Trusted Platform Module) chip that keeps cryptographic keys secure. Secure Boot ensures that the unit boots using only software that is signed and trusted by manufacturer. A set of cybersecurity tools is available as standard including VPN and stateful Firewall support for data security and user authentication.

Specifications - Merlin 3100 Series

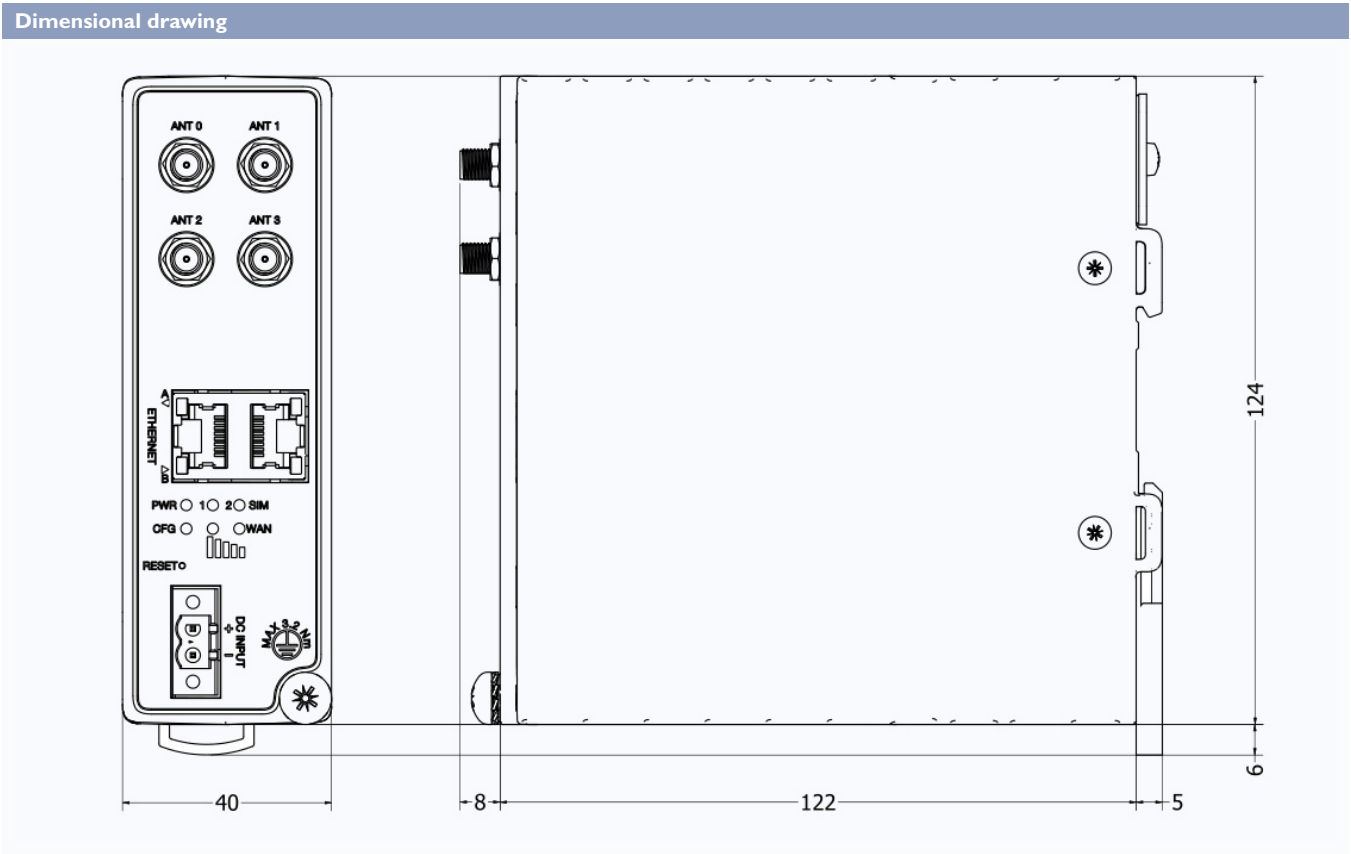

Housing	
Dimensions (W x H x D)	40 x 135 x 124 mm
Housing	Full metal
Weight	Approx 420g

Power parameters	
Operating voltage	9 to 36 VDC isolated
Power consumption	10 W typical

Environmental	
Temperature, operating	-20 to +70°C
Temperature, storage and transport	-30 to +85°C
Ingress protection	IP30
Humidity, operating	5-95% relative humidity

Approvals	
EMC	- EN/IEC 61000-6-2, Immunity industrial environments (pending) - EN/IEC 61000-6-4, Emission industrial environments (pending)
Safety	EN 62368-1, Safety Communication Technology (pending)

Interface	
Ethernet	Ethernet 2 x 10/100/1000 Mbit/s, Ethernet TX, RJ45
Mobile	5G. Supports NSA and SA modes
GNSS	Where supported - GPS, GLONASS, BeiDou, Galileo
SIM cards	2 x Mini-SIM (2FF) card slots to rear, covered by plate
Antenna connectors	4 x SMA compatible connectors

MTBF hours	
Telcordia	1.524.000 Hours

Software Features	
Management	Web interface (HTTPS), SMS management support, CLI via console, SSHv2, TFTP, SNMPv1/v2c/3, Secure Copy (SCP), Flexible alarm and event system, Port monitoring
Monitoring	Built-in diagnostics and packet tracing, event logging, SNMP Traps, Syslog
IP Routing	IPv4 and IPv6, DHCP, DynDNS, NAT, NAT Traversal, NTP Client, VLAN support, Packet filtering, Port forwarding, BFD, BGPv4, OSPF, RIP (v1 and v2), IPSec/L2TP/GRE, DMVPN, SNMP v1/v2/v3, TLS 1.2, 802.1x authentication, IEC104, QoS, VRRP, VRF
Security	Stateful inspection firewall, RADIUS, TACACS+
IPSec VPN	IKE Version 2, X.509 certificates, ECC, SHA2_512 support, AES_CBC (256), PFS, SCEP, DH_8192, FlexVPN
SCADA Protocol Conversion	Control of I/O from SCADA master, IEC 60870-5-104, IEC 60870-5-101, IEC 61850, Modbus TCP, DNP3, Serial to Ethernet, MQTT
RTU Functionality	Monitoring and Control of I/O from SCADA master, Protocol conversion, Basic PLC functions

Mobile Frequency Bands				
Region	3G Bands	LTE Bands	5G NR	GNSS
Global 5G	B1, B2, B4, B5, B8, B19	B1, B2, B3, B4, B5, B7, B8, B12, B13, B14, B17, B18, B19, B20, B25, B26, B28, B29, B30, B32, B34, B38, B39, B40, B41, B42, B43, B48, B66, B71	n1/ 2/ 3/ 5/ 7/ 8/ 12/ 13/ 14/ 18/ 20/ 25/ 26/ 28/ 29/ 30/ 38/ 40/ 41/ 48/ 66/ 70/ 71/ 75/ 76/ 77/ 78/ 79	Yes. Passive antenna only

Warranty	
Validity	5 years

Art.no.	Product	Ethernet	SMA Connectors	GNSS	Region
3460-31500	Merlin-3103-T2G-PFO-DCi0936	2	4	Yes. Passive antenna only	Global 5G

Accessories	
3125-0150	PS-60, power supply. DIN-mounted. Input voltage: 100 to 240 VAC, 50 to 60 Hz or 110 to 250 VDC
Note: antennas not included	